




Gateway SA1 Speaker Replacement

This is a guide on how to replace broken or non-working speakers.


Written By: Shawn Cabral

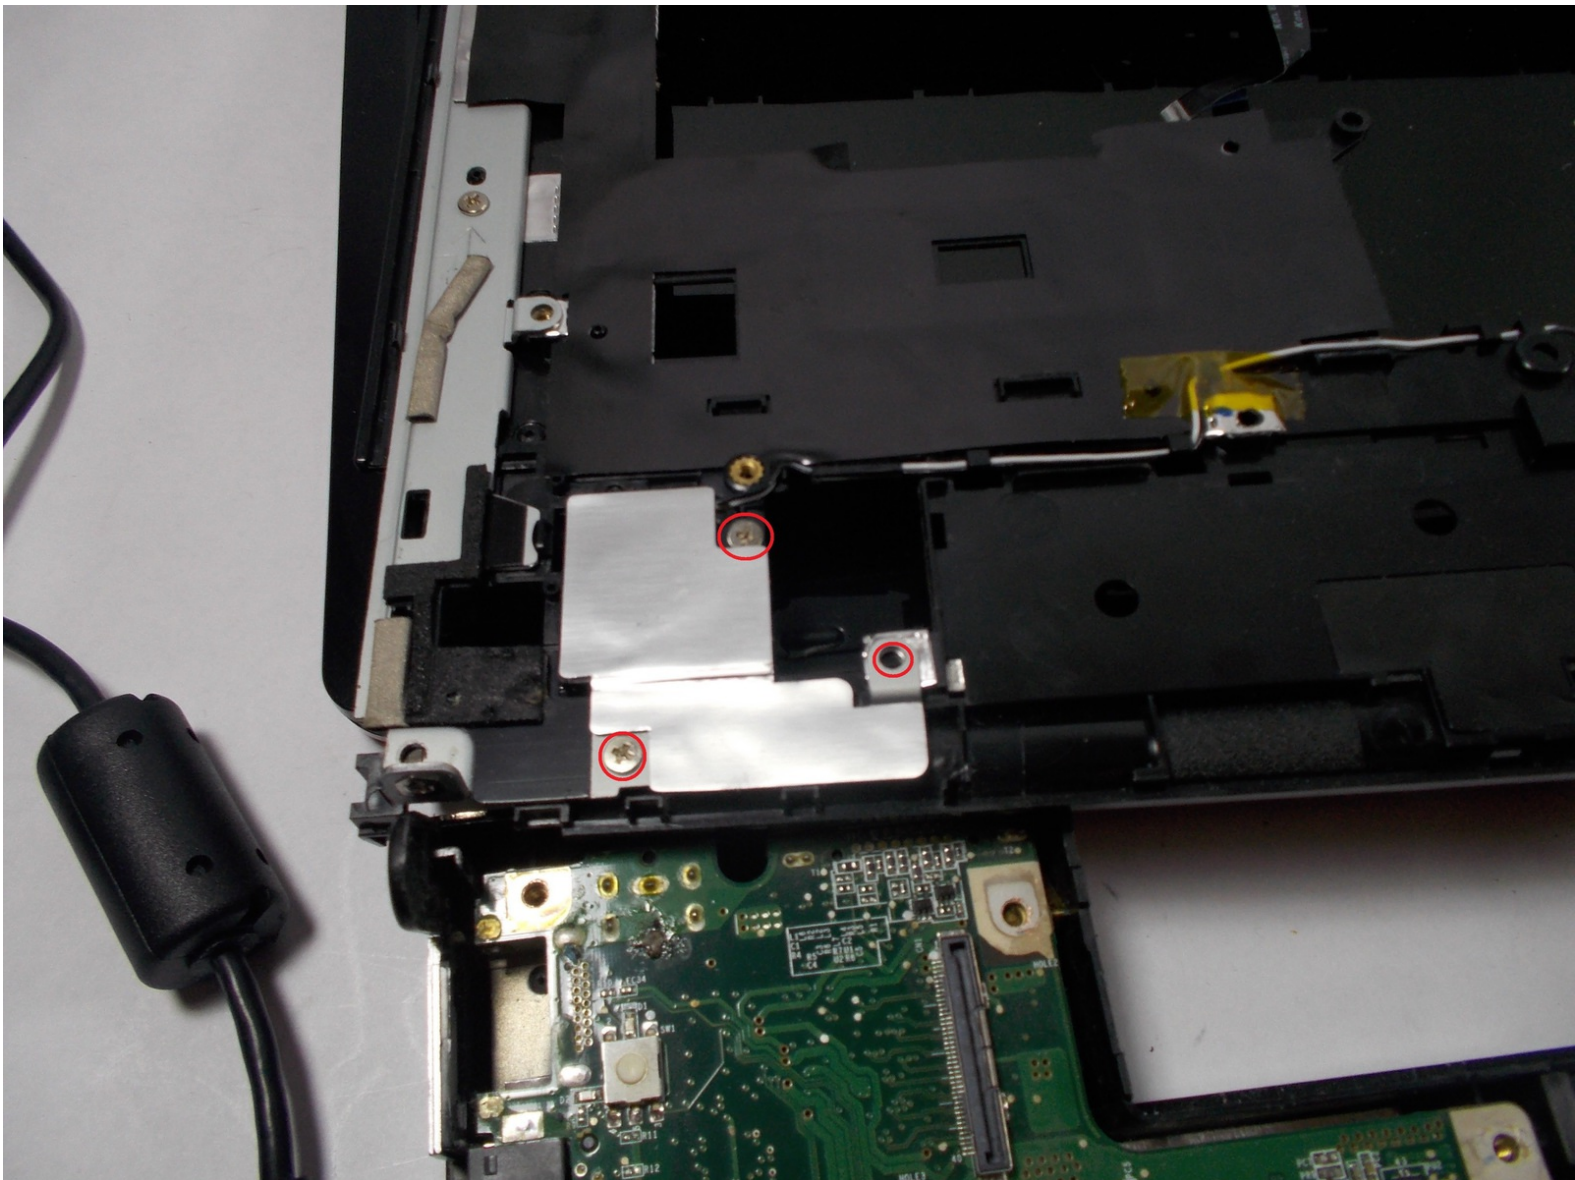

INTRODUCTION




Notice: The outer casing must first be removed.

Step 1 — Speaker

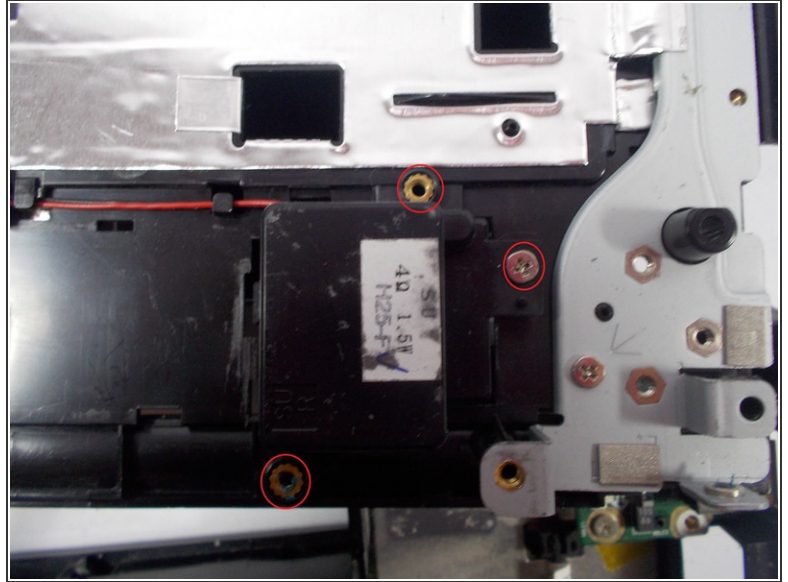

- Locate speakers under the plastic casing usually covering the speakers
- Remove screws in the 7 possible locations.

Step 2

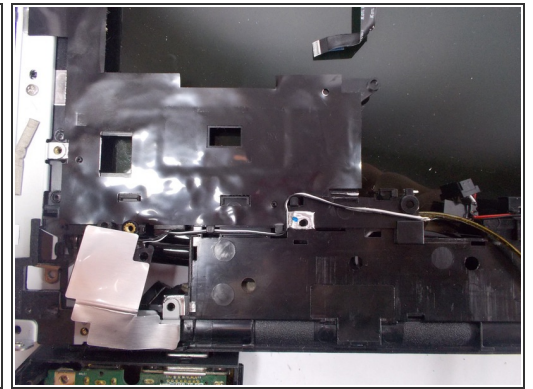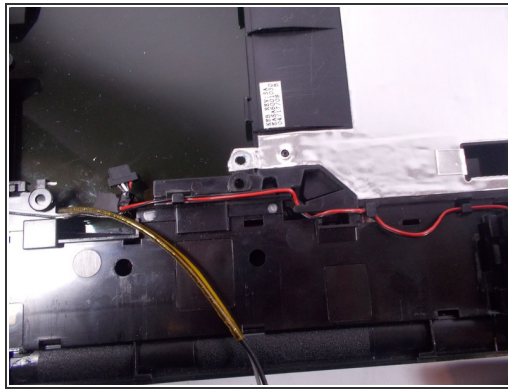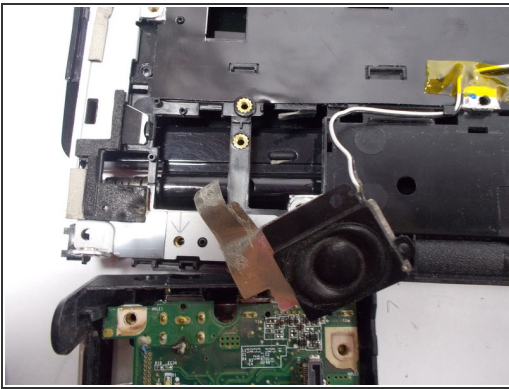

- Remove wires from their grooves in casing.

Step 3



- Re-insert wires on new speakers into grooves and screw them in.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 07:20:51 AM.